



Specifications NXP 150

LIFTING CAPACITY (Free on wheels)	15 Tonnes Pick 'N' Carry Duty 230 Kgs Aerial Platform Duty	TYRES	11.00 x 20 (4 Nos.) 14.00 x 25 (2 Nos.)
ENGINE	Tata 4 cylinder, water cooled diesel engine or equivalent engine	Wheel base Wheel track	4150 mm Front 1900 mm Rear 1800 mm
Rated Power	49 bhp at 2200 RPM	HOIST	Winch is driven by hydraulic motor and fitted with rope tensioner. Hoisting is provided through self adjusting hook block
STEERING	Full power orbitrol with twin hydraulic double acting cylinders and 40° articulation on either side	Hoist Speed	employing 4 falls of 13 mm dia rope 50 Mtrs./Min. (Line Speed)
Turning Radius	6.5 mtrs (approx)	BOOM LUFFING Range	-3° to + 75°
TRANSMISSION	Heavy duty synchromesh transmission with 8 forward and 2 reverse speeds and Hi-low drive selector for creep speed Front axle is rigidly mounted on the chassis and rear drive axle is mounted with leaf springs Heavy duty hydraulic clutch	SAFETY	 Front outriggers Safe load indicator system with hydraulic cutoff Basket capacity limiter (230 Kgs) Over Hoist hydraulic cutoff Hose failure protection
Top Speed	32 KMPH on even metaled road (without load)		Audio over hoisting indicationSafety brakes on hoistSelf adjusting hook block
Gradeability	40% (unladen)		 Front and side Proximity Sensors Front and rear wheel guards
HYDRAULIC SYSTEM	 Gear/Intra Vane type Main Pump Five spools control valve with built in Relief valve for crane operation Three spools control valve for basket operation Suction line has 100 mesh size strainer while return line is fitted with 25 micron full flow filter Two double acting lift cylinders, two double acting steering cylinders and one double acting extension cylinder 	STANDARD EQUIPMENT	 Front mounted fully enclosed wide view cabin Rear View Camera Front and rear work lights Beacon rotating light Reflectors & Rear View Mirrors Took Kit Cabin Fan Gauges Water temperature Engine oil pressure
BRAKES	Dual Circuit BrakesFully air actuated brakes on rear wheels and pneumatically assisted		c) Fuel Gauge d) RPM meter cum hour recorder e) Air Pressure Gauge f) Speedometer
	hydraulic brakes are provided on front wheels Parking brake is pneumatically operated, fail safe type	OPTIONAL EQUIPMENT	 Fly jib: 2.7 Mtrs., (1.25 Tonnes Capacity) Spark arrestor Fire extinguisher Drag Winch
ELECTRICAL SYSTEM	12V. Negative earth with 35 amp. Alternator & 75 amp. hr. battery		 Cabin front glass protector Helper/Slinger seat Variant Model: Fitted with Tata 76 bhp engine
TELESCOPIC BOOM	 4 section slotted boom with 2 sections hydraulically operated & synchronized and 4th section power extended Double acting hydraulic cylinder with counter balance safety valve is provided for boom telescoping 	OPERATING WEIGHT Front Axle Rear Axle Total Weight	5570 Kgs. 9710 Kgs. 15310 Kgs.

AERIAL PLATFORM

Access platform / Man Lift Basket is provided with quick coupling connections for easy and fast Installation / Removal

1800 mm (1.8 m)

Width 910 mm (0.91 m)

Capacity 230 Kgs (Rated at 60%)

70°

Maximum Working Height 21 m Maximum Platform Height 19 m 16.6 m

Maximum Horizontal

Outreach

Length

Jib Angle - Up - Down

Jib Articulation Range

Platform Rotation

70°

180° (90° on either side)

Hydraulically Driven through Slew / Rotary Drive

140° with 2 Mtrs. above & 2 Mtrs. below horizonal

















Platform Rotation





FRONT OUTRIGGERS Front Outriggers for added safety during high lift / man lift operations.



 GROUND CLEARANCE Ground clearance of 350mm for easier rough terrain operation.




SLOTTED BOOM






Front mounted, ergonomically designed cabin for better visibility and driveability

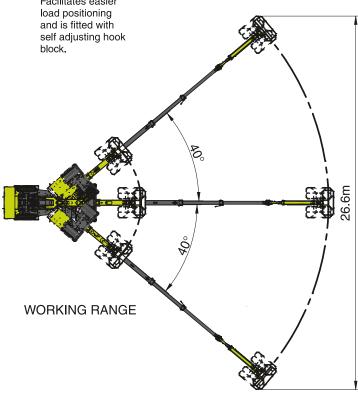


Man Basket Load Chart

- Man Basket Maximum Capacity 230 Kgs
- Front outriggers are provided for added safety SWL is based on 60% Stability and Strength.

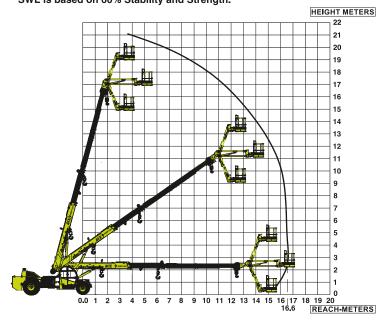

Pick N Carry Load Chart

- Max. capacity flyjib: 1.25 tonnes
- Max. capacity manual extension : 2.0 tonnes
- SWL is based on IS4573

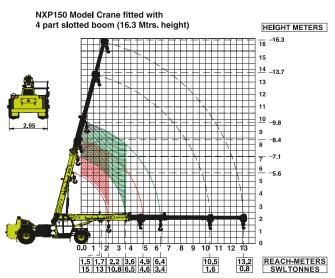




ILT TO PERFORI





RELIABLE AND DEPENDABLE **EFFICIENCY**

NETWORK

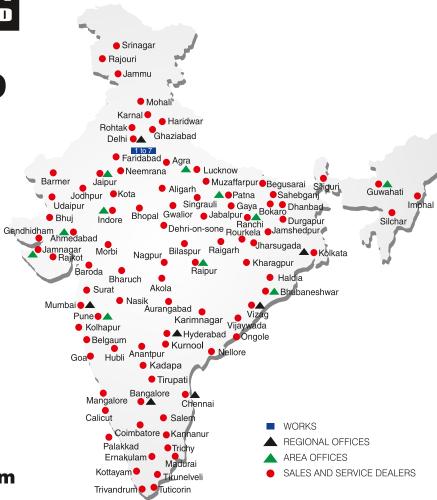



MARKETING H.Q.

4th Floor, Pinnacle Surajkund, NCR-121009 Ph.: +91-129-4550000 Fax: +91-129-4550022

E-mail: marketing@ace-cranes.com

REGISTERED OFFICE

Dudhola Link Road, Dudhola Palwal-121102, Harvana Ph.: +91-1275-280111 Fax: +91-1275-280133

CIN : L74899HR1995PLC053860

MUMBAI OFFICE

31, "Kalpataru Court" Chembur, Mumbai - 400074 Ph.: +91-22-25206846, 25207070

Fax: +91-22-25207071

E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Forma Towers" 84-A. Second Floor AJC Bose Road, Kolkata - 700014 Ph: +91-9038070630

E-mail: acekolkata@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165 Eldams Road, Alwar Pet Chennai - 600018

Ph.: +91-44-24314253 Fax: +91-44-24314252

E-mail: acechennai@ace-cranes.com

HERE TO SERVE YOU.

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Kochi.



Action Construction Equipment Ltd.

