


Specifications 20XW

LIFTING CAPACITY (Free on wheels)	20 Tonnes
ENGINE	Simpson (CEV BSIV), 4 cylinder water cooled diesel engine Model SIV436-F23
Rated Power	74 HP (54 KW) at 2200 RPM
TRANSMISSION	Heavy duty, sliding mesh with 6 forward and 2 reverse speeds with high low range selector.
Clutch	Heavy duty, single, dry friction cerametallic clutch plate with diaphragm type pressure plate.
Top Speed	28 KMPH Without load
BRAKES	Air operated S Cam dual brakes on front wheels and air operated disc brakes on rear wheels. Rear wheels brakes are actuated through a single pedal Parking brake is pneumatically operated fail safe type
HYDRAULIC	<ul> <li>Gear / Intra Vane type Main Pump.</li> </ul>
SYSTEM	<ul> <li>Four spools control valve with built</li> </ul>
	in Relief valve (heavy duty)  Suction line has 100 mesh size Strainer while return line is fitted with 25 micron full flow filter
	<ul> <li>Two double acting lift cylinders, two double acting steering cylinders and two double acting extension cylinders.</li> </ul>
STEERING	Lever operated with 55° articulation on either side and turning radius of 6.5 Mtrs. (approx) on outer rear wheels
TELESCOPIC BOOM	Three part boom with hydraulically operated extensions
Telescoping Time	18 Sec.
BOOM LUFFING Range Time	-3° to + 66° 20 Sec.
HOIST	Winch is driven by hydraulic motor and fitted with hook block employing 6 falls of 13mm dia. Rope.
Hoist Speed	50 Mtrs./Min. (Line speed)
TYRES Front Rear	12.00 x 20 – 18 PR (4 Nos.) 14.00 x 25 – 20 PR (2 Nos.)
ELECTRICAL SYSTEM	12V, Negative earth with 35 Amp. alternator and 100 Amp hr. battery

FLUID CAPACITIES	
Engine	9.5 Ltrs.
Fuel Tank	76.00 Ltrs
Hydraulic Tank	125.00 Ltrs.
Transmission	48.00 Ltrs.
SAFETY	<ul> <li>Audio overload indication.</li> <li>Hose failure protection.</li> <li>Audio over hoisting indication</li> <li>Safety brakes on hoist.</li> <li>Cylinder guards</li> </ul>
STANDARD EQUIPMENT	<ul> <li>ROPS fully enclosed wide view cabin with rotomould canopy.</li> <li>Front tyre protector.</li> <li>Front and rear work lights.</li> <li>Reflectors &amp; rear view mirror.</li> <li>Tool kit.</li> <li>Gauges:- <ul> <li>Water temperature.</li> <li>Engine oil pressure.</li> <li>RPM meter cum hour recorder</li> <li>Air pressure</li> </ul> </li> </ul>
OPTIONAL EQUIPMENT	<ul> <li>Fly jib: 2.75 Mtrs., 1.25 Tonnes Capacity</li> <li>Steering Wheel in lieu of lever type steering</li> <li>Spark arrestor</li> <li>Fire Extinguisher</li> <li>4 part boom - 20 Mtrs. height</li> <li>5 part boom - 22 Mtrs. height</li> <li>Over Hoist hydraulic cutoff</li> <li>Safe load indicator / LMI</li> </ul>
OPERATING WEIGHT	15970 Kgs.

# ACE 20XW 3-Part Boom (11.75 Mtrs. Height)

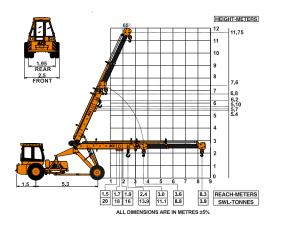



## **Specifications**

### **20XW**



1 ROPS CABIN
Wide view ROPS cabin for better visibility.



GROUND CLEARANCE High ground clearance of 400mm for easier rough terrain operation.



INCREASED VISIBILITY
Bigger size front windscreen
and re-routing of hoses
provide much better front
visibility.



STEERING CYLINDERS 880 mm stroke cylinders ensure proper steering even in loose, sandy & rocky terrains.



LIFT CYLINDERS Heavy duty lift cylinders ensure better lifting capacities.




AIR BRAKES Fully air operated S CAM dual brakes on front wheels




STEERING WHEEL & CONTROLS Steering wheel is provided as an optional feature, which along with ergonomically placed operator console and instrument cluster ensures ease of operation.



ACE 20XW 4-Part Boom (20 Mtrs. Height) Max. Capacity Manual Extension: 2 Tonnes ACE 20XW 5-Part Boom (22 Mtrs. Height) Max. Capacity Manual Extension: 2 Tonnes

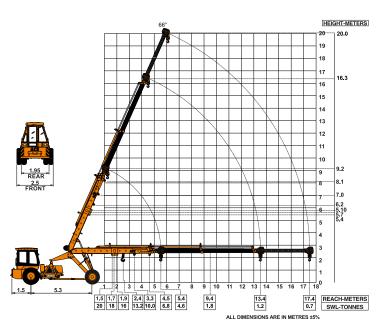

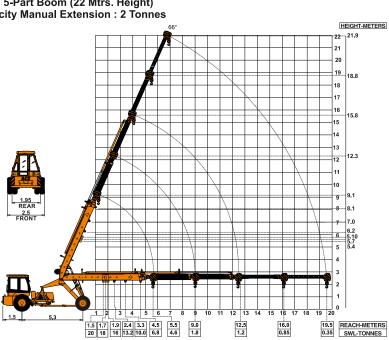


# BUILT TO PERFORM





## **NETWORK**

# **RELIABLE AND** DEPENDABLE **EFFICIENCY**

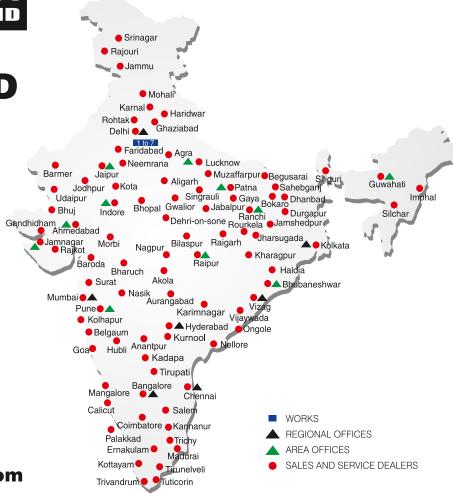



#### MARKETING H.Q.

4th Floor, Pinnacle Surajkund, NCR-121009 Ph.: +91-129-4550000 Fax: +91-129-4550022

E-mail: marketing@ace-cranes.com

#### **REGISTERED OFFICE**

Dudhola Link Road, Dudhola Palwal-121102, Haryana Ph.: +91-1275-280111 Fax: +91-1275-280133

CIN: L74899HR1995PLC053860

#### **MUMBAI OFFICE**

31, "Kalpataru Court" Chembur, Mumbai - 400074 Ph.: +91-22-25206846, 25207070

Fax: +91-22-25207071 E-mail: acemumbai@ace-cranes.com

#### **KOLKATA OFFICE**

"Forma Towers" 84-A, Second Floor AJC Bose Road, Kolkata - 700014 Ph.: +91-9038070630

E-mail: acekolkata@ace-cranes.com

#### **CHENNAI OFFICE**

1st Floor, "Alsa Regency", 165 Eldams Road, Alwar Pet Chennai - 600018

Ph : +91-44-24314253 Fax: +91-44-24314252

E-mail: acechennai@ace-cranes.com

## HERE TO SERVE YOU.

#### SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Kochi.



### **Action Construction Equipment Ltd.**

Contact:

