

ACE NX 360°

NextGen Multi Activity Crane

360° Full Slew and Pick 'N' Carry,
Rough Terrain Articulated
4x4 Drive Crane

ACE INDIA'S NO. 1
CRANE BRAND



Specifications

NX 360°

MAX LIFTING CAPACITY	20 Tonnes	SUPER STRUCTURE	Super structure is capable of continuous slewing in either direction and mounted with sealed slew bearing.
ENGINE	Volvo Eicher (CEV Stage IV) Diesel Engine Model E483 CRDi, 4 cylinder, Water Cooled, Turbo Charged Engine with Electronic Control Unit (ECU)	OUTRIGGERS	
Rated Power	101 HP at 2200 RPM	Front outriggers	Hydraulically operated telescopic outrigger beams with vertical hydraulic jacks fitted with safety lock valve.
TRANSMISSION	Heavy duty, synchromesh with 8 forward and 2 reverse speeds and hi-low drive selector for creep speed	Rear outriggers	Hydraulically operated swing and telescopic outrigger beams with vertical hydraulic jacks fitted with safety lock valve.
Axles	Front Drive axle is rigidly mounted on the chassis. Rear drive axle is mounted with 2 nos. Leaf springs.	SLEWING	Hydraulic motor fitted with counter balance valve providing 360° continuous slew
Drive	4 Wheel drive.	BOOM DERRICKING	Two double acting hydraulic cylinders with counter balance safety valve
Clutch	Heavy duty, single, dry friction type hydraulic clutch.	BOOM LUFFING Range	-2° to + 64°
Top Speed	38 KMPH on even metaled Road (without load)	TELESCOPIC BOOM	<ul style="list-style-type: none"> 4 section boom with 2 sections hydraulically operated & synchronized and 4th section power extended Double acting hydraulic cylinder with counter balance safety valve is provided for boom telescoping
Gradeability	40 % (unladen)	HOIST	Winch is driven by hydraulic motor and fitted with rope tensioner. Hoisting is provided through self adjusting hook block employing 6 falls of 13mm dia. Rope.
STEERING	Full power orbitrol with twin hydraulic double acting cylinders and 40° articulation on either side	Hoist Speed	40 Mtrs./Min (Line Speed)
Turning Radius	7.6 Mtrs. on outer rear wheels.	ELECTRICAL SYSTEM	12v, Negative earth.
BRAKES	<ul style="list-style-type: none"> Dual Circuit Brakes Fully Pneumatic brakes on front and rear wheels. Parking brake is pneumatically operated, fail safe type 		
HYDRAULIC SYSTEM	<ul style="list-style-type: none"> Gear type tandem pump Four spools for crane operation. Seven spools for outrigger operation. Suction line has 100 mesh size strainer while return line is fitted with 25 micron full flow filter. 		



NX 360°



Specifications

NX 360°

TYRES

Front	12.00x20-18 PR (4 NOS.)
Rear	12.00x20-18 PR (4 NOS.)

SAFETY

- Safe load indicator with cutoff
- Hose failure protection
- Audio over hoisting Indication with cut off
- Safety brakes on hoist
- Self-adjusting hook block
- Rear wheel guards

OPTIONAL EQUIPMENT

- Flyjib (Max Capacity : 1.25 Tonnes)
- Spark arrestor
- Fire Extinguisher
- Front and side Proximity Sensors
- Cabin front glass protector

STANDARD EQUIPMENT

- ROPS fully enclosed wide view cabin
- Front work lights
- Reflectors and rear view mirror
- Tool kit
- Cabin fan
- Wiper motor
- Instrument Cluster :-
 - a) Fuel level gauge
 - b) Air pressure gauge
 - c) Oil pressure gauge
 - d) Coolant temp
 - e) Engine RPM
 - f) Speedometer
 - g) Odo meter
 - h) Engine Hour Recorder
 - i) Fault Detector Codes (P-Codes)
- Rear view camera
- Front Outriggers
- Beacon Rotating Light

OPERATING WEIGHT

Front axle	10200 Kgs.
Rear Axle	10200 Kgs.
Total Weight	20400 Kgs.






Load Chart : Pick 'N' Carry Duty (Tonnes)

- Max. Capacity Fly Jib : 1.25 Tonnes
- Max. Capacity Manual Extension : 2.0 Tonnes



MULTI ACTIVITY CRANE

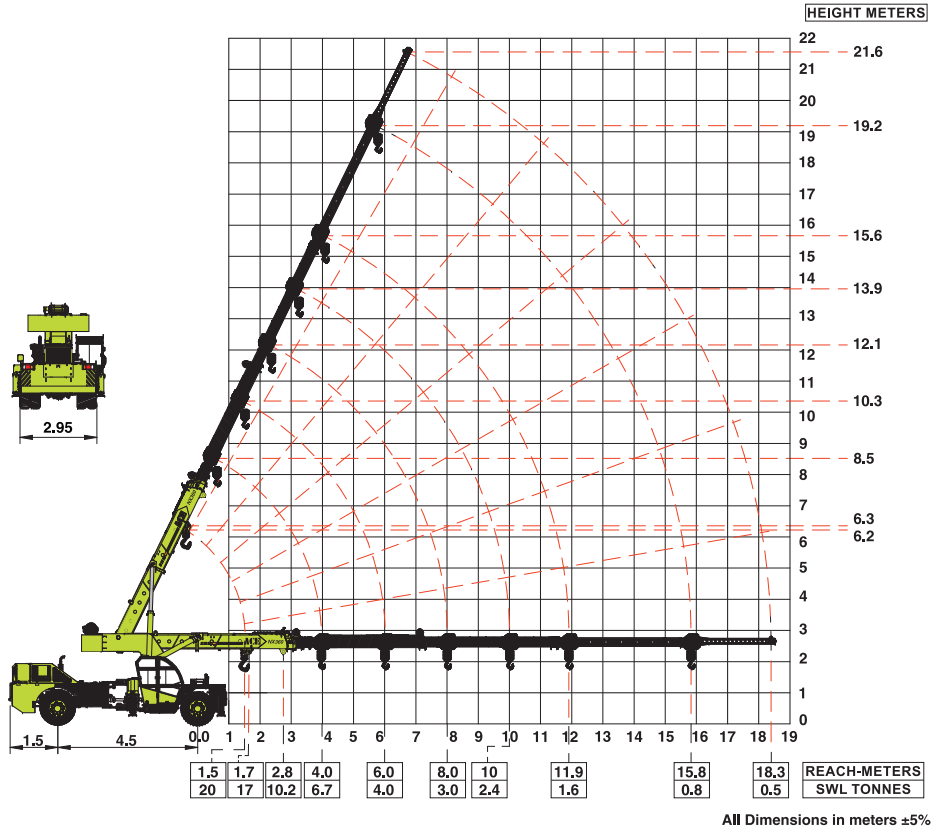

Load Chart : Slew Duty (Kgs)

- Outriggers : Fully swung out and fully extended
- Slewing Range : 360° Continuous

SLEW RADIUS	BOOM LENGTH IN METERS						
	HOOK BLOCK (A)						FLY JIB
	MANUAL EXT. CLOSED				MANUAL EXT. OPEN	BOOM FULLY EXTENDED	
(M)	6.5	8.5	10.5	12.5	14.5	17.1	19.9
2.5	18000	9000					
2.8	16000	9000					
3.0	14000	9000					
4.0	10500	9000	9000				
5.0	7500	7250	7100	7000			
6.0		5800	5600	5400	5300		
7.0		4100	4100	4000	4000	2000	
8.0			3800	3800	3600	1800	1250
9.0			2700	2700	2600	1600	1200
10.0				2000	2000	1200	1000
11.0				1800	1800	1100	900
12.0					1400	1100	800
13.0					1200	1000	700
14.0						1000	700
15.0						800	600
16.0						700	600
17.0						600	500

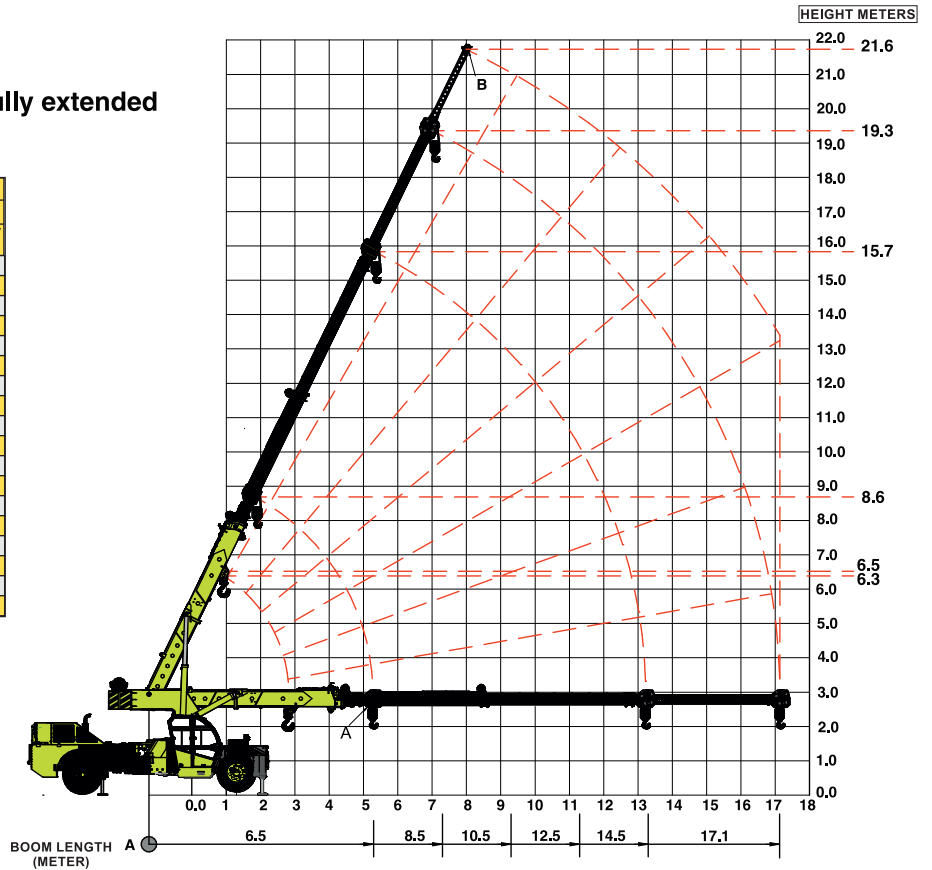

NOTE:

- Lifting capacities for supported operation only on firm level ground.
- SWL are based on 85% stability as per IS: 4573.
- Lifting capacity = Actual load + Chain/Slings.

Mobile Cranes (9-80 Tonnes)



Tractors



Harvester Combine



Forklifts



Vibratory Rollers



Backhoe Loader




Motor Grader



Piling Rigs



Tower Cranes

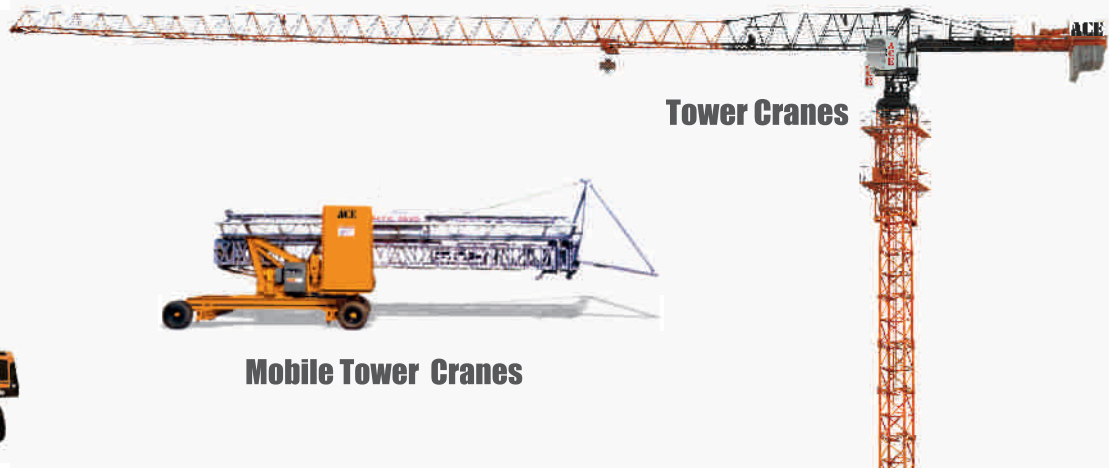

Mobile Tower Cranes




BUILT TO PERFORM



**RELIABLE AND
DEPENDABLE
EFFICIENCY**

NETWORK

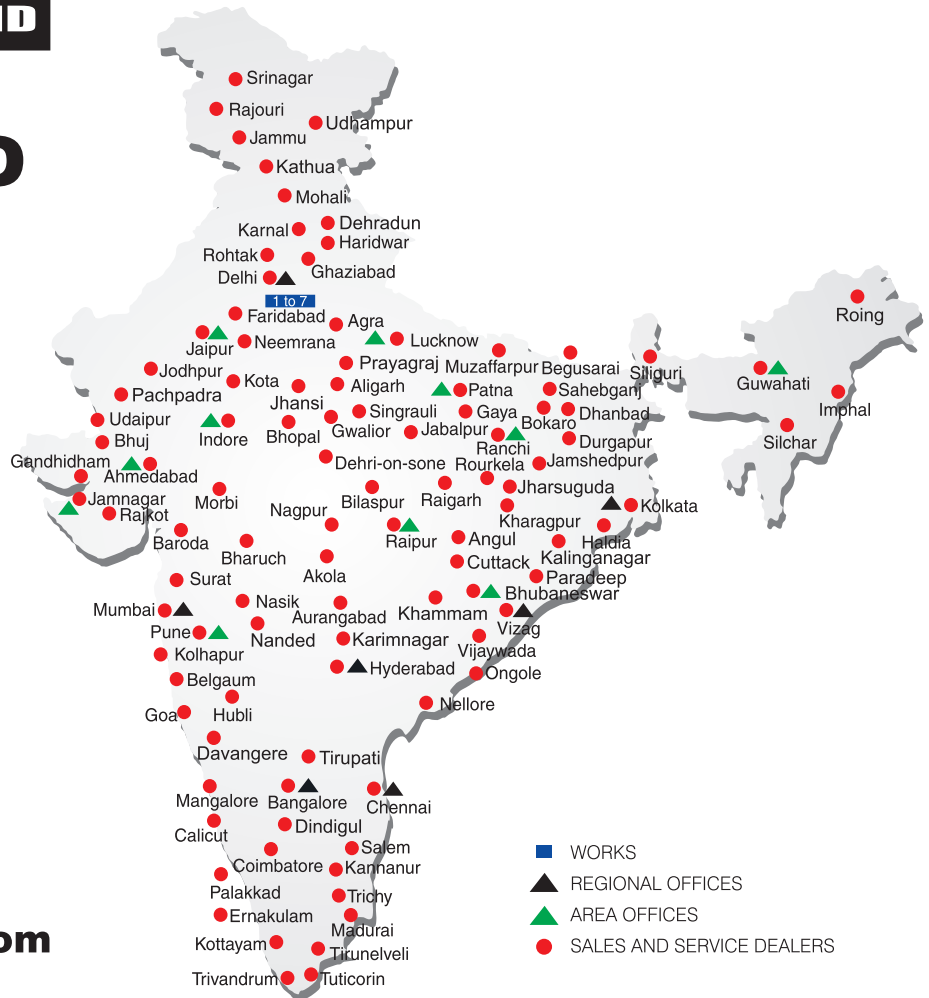

**Toll Free Help Line
1800 1800 004**

www.ace-cranes.com

MARKETING H.Q.

4th Floor, Pinnacle
Surajkund, NCR-121009
Ph. : +91-129-4550000
Fax : +91-129-4550022
E-mail: marketing@ace-cranes.com

REGISTERED OFFICE

Dudhola Link Road, Dudhola
Palwal-121102, Haryana
Ph.: +91-1275-280111
Fax: +91-1275-280133
CIN : L74899HR1995PLC053860

MUMBAI OFFICE

31, "Kalpataru Court"
Chembur, Mumbai - 400074
Ph.: +91-22-25206846, 25207070
Fax: +91-22-25207071
E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

84A, AJC Bose Road, Fomra Tower -
2nd Floor, Kolkata-700014
Ph.: +91-9038070630
E-mail: acekolkata@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165
Eldams Road, Alwar Pet
Chennai - 600018
Ph.: +91-44-24314253
Fax: +91-44-24314252
E-mail: acechennai@ace-cranes.com

HERE TO SERVE YOU.

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkata, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubaneswar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Kochi.



Action Construction Equipment Ltd.

Contact:



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by $\pm 5\%$. Accessories if shown are not part of the Standard Equipment.